


PM-TB

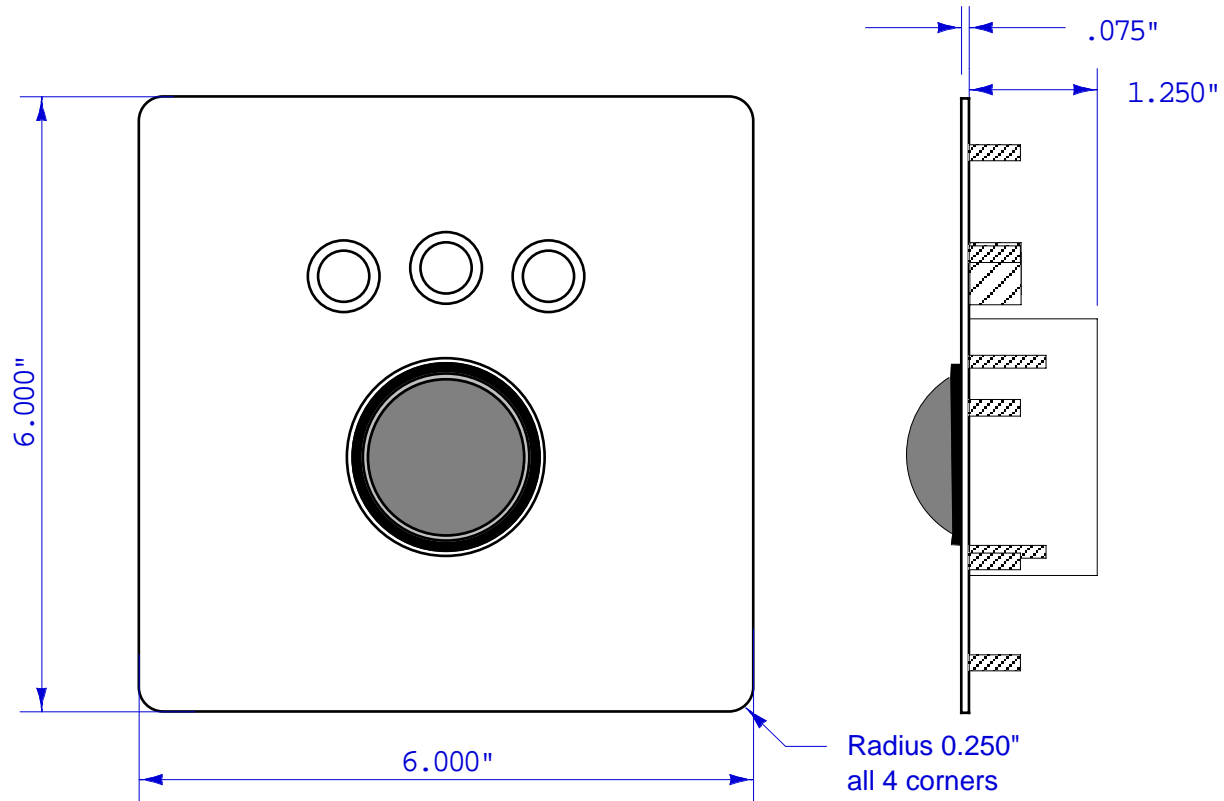

KEY SWITCH

MATERIAL: industrial Silicone Rubber
LIFE: Greater than 1 million cycles
TRAVEL: 0.060"
FEEDBACK: Tactile with Mechanical Snap

HUMIDITY

100% Humidity Resistant

POWER

TRACKBALL: 5V@150ma (from mouse connection port)

FLAMMABILITY

PRINTED CIRCUIT BOARD: 94VO
SILICONE OVERLAY: 94HB
INTERFACE CABLE: 94VO

TEMPERATURE

-40 F to +194 F (-40 C to +90 C)


SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

3/16" DIA THRU HOLE
12 PLACES

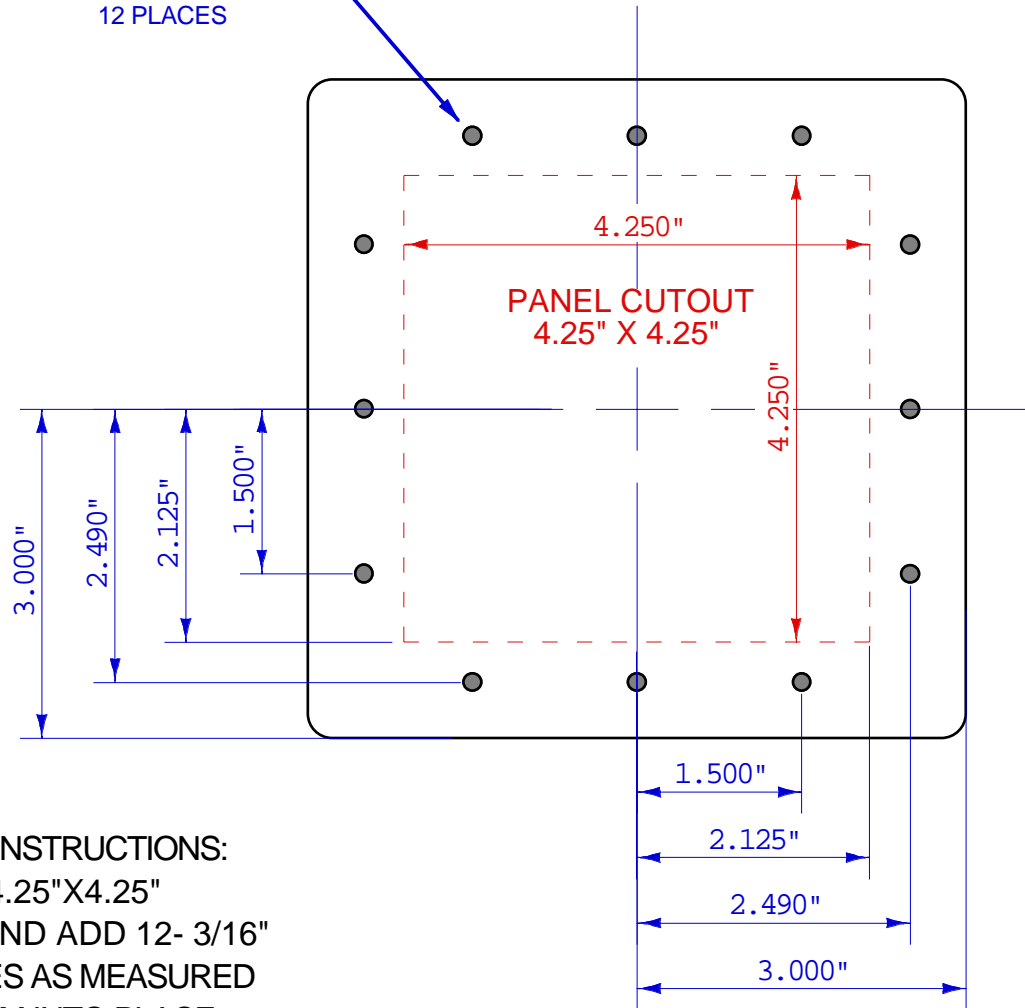

MOUNTING INSTRUCTIONS:

- CUT OUT 4.25"X4.25" SQUARE AND ADD 12- 3/16" THRU HOLES AS MEASURED
- DROP HP-PM INTO PLACE BRINGING THE STUDS THROUGH THE 3/16" HOLES AND TIGHTEN DOWN WITH SUPPLIED NUTS.