


SK-101/ SLK-101

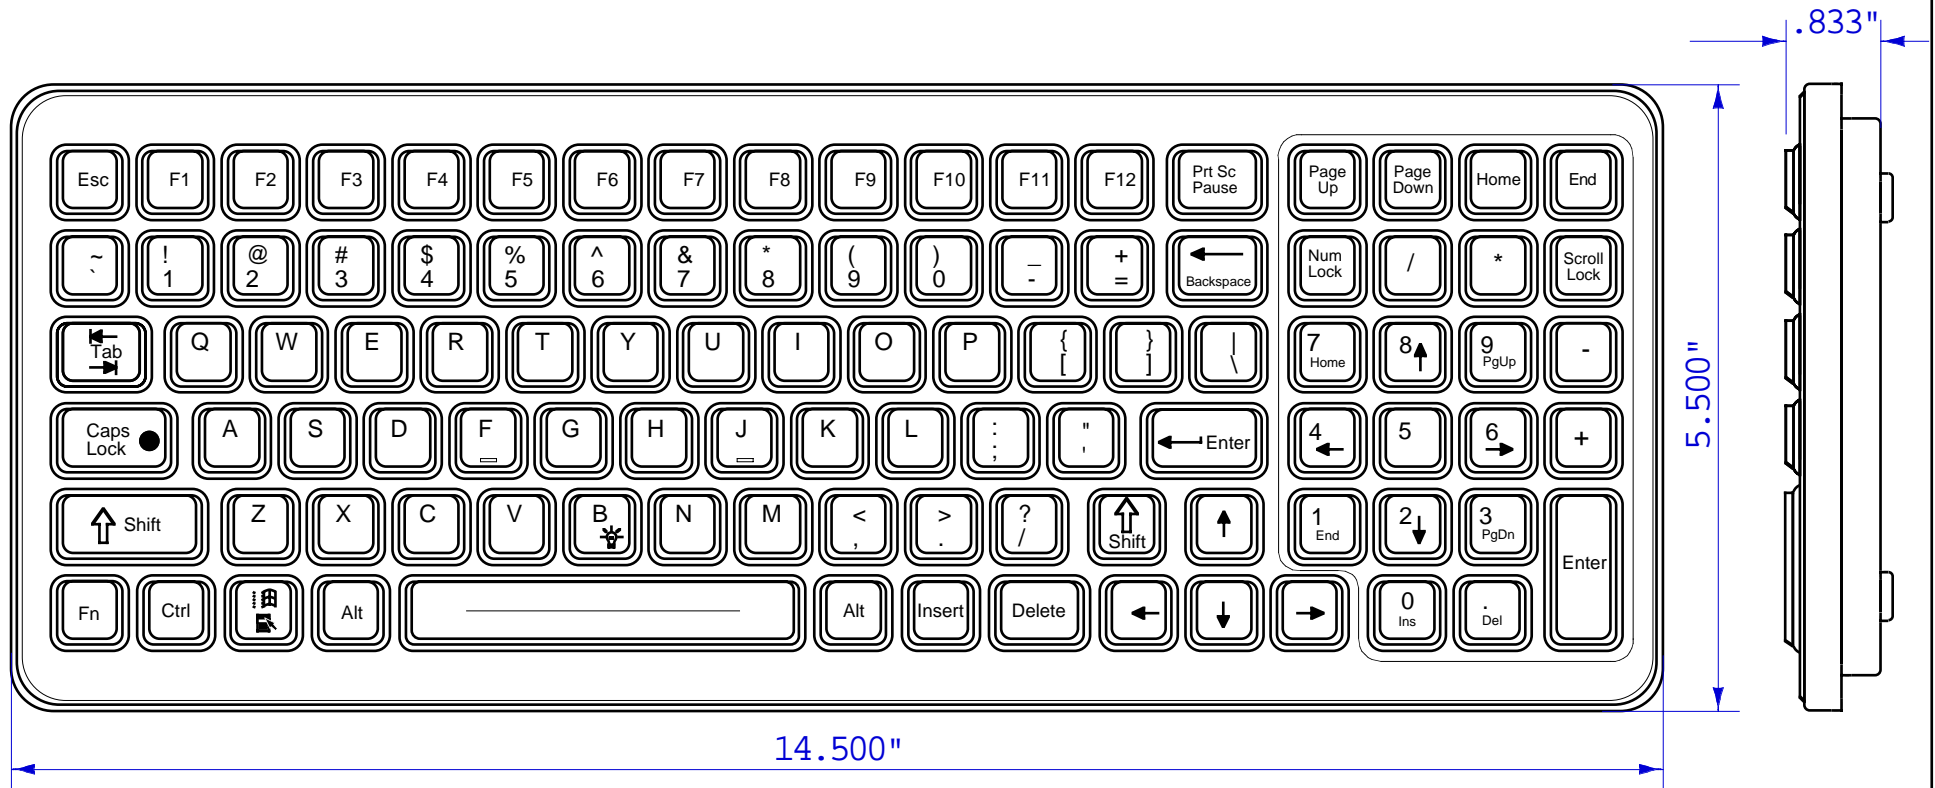

KEY SWITCH

MATERIAL: industrial Silicone Rubber
 LIFE: Greater than 10 million cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 5 oz. (130g)
 FEEDBACK: Tactile with Mechanical Snap

HUMIDITY

100% Humidity Resistant

POWER

KEYBOARD: 5V@20ma (from CPU port)
 HULAPOINT: 5V@10ma (from mouse connection port)

FLAMMABILITY

PRINTED CIRCUIT BOARD: 94VO
 SILICONE OVERLAY: 94HB
 INTERFACE CABLE: 94VO

TEMPERATURE

-40 F to +194 F (-40 C to +90 C)


SHOCK

3 X 11 ms pulses of 50g on each of 3 axis


VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

Copyright 1999-2000 Multi-Technology Sales. All rights reserved.

 Texas Industrial Peripherals 2621 Ridgepoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 837-0283 Fax: (512) 927-8530	Part Number: SK-101-MKT	Drawing Number: TIPSK101MKT	Sheet: 1 OF 1	
	Drawing Title: SK-101-MKT	Revision: 1.000	Date: 12.04.03	JAE

SK-101/ SLK-101

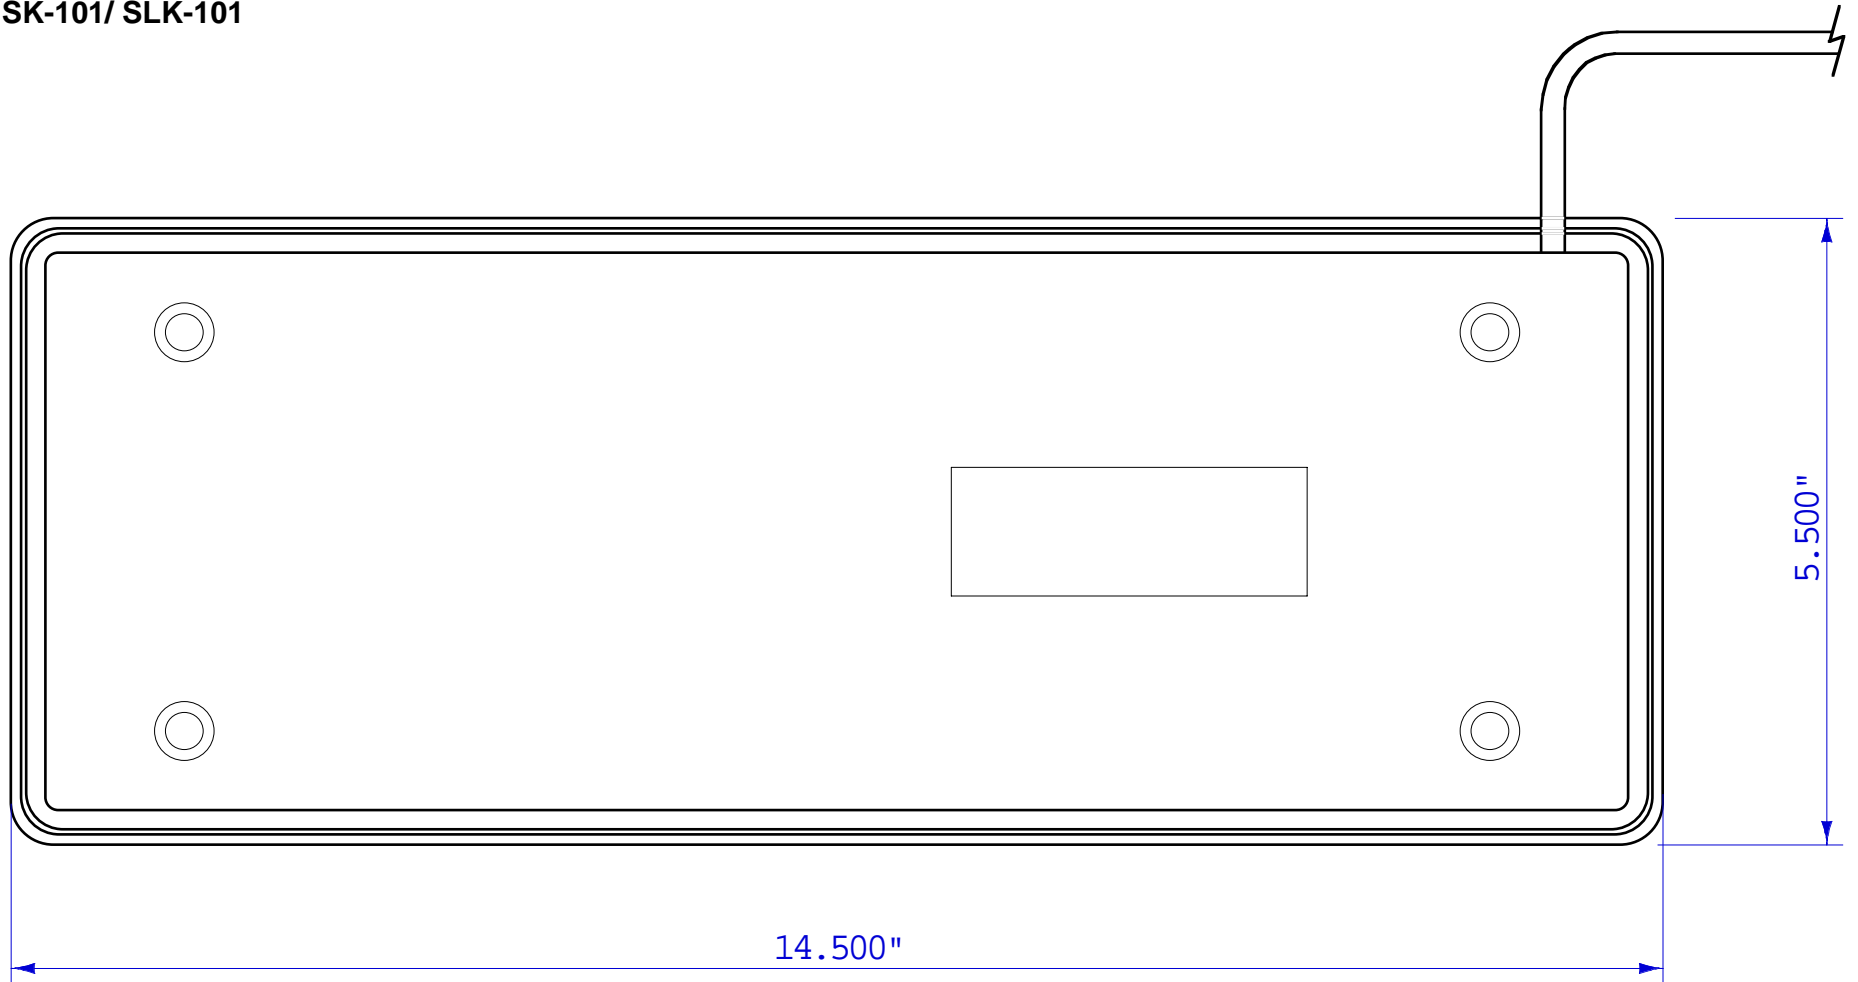

ENCLOSURE FABRICATED FROM:
GE CYCLOLY LG900 PC/ABS/UV
STABLE OR EQUIVALENT

Copyright 1999-2000 Multi-Technology Sales. All rights reserved.



Texas Industrial Peripherals
2621 Ridgepoint Dr. Suite 235
Austin, Texas 78754

Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: SK-101-MKT

Drawing Title: SK-101-MKT

Drawing Number: TIPSK101MKT

Revision: 1.000

Sheet: 2 OF 2

Date: 12.04.03

JAE