


**SK-102/ SLK-102**

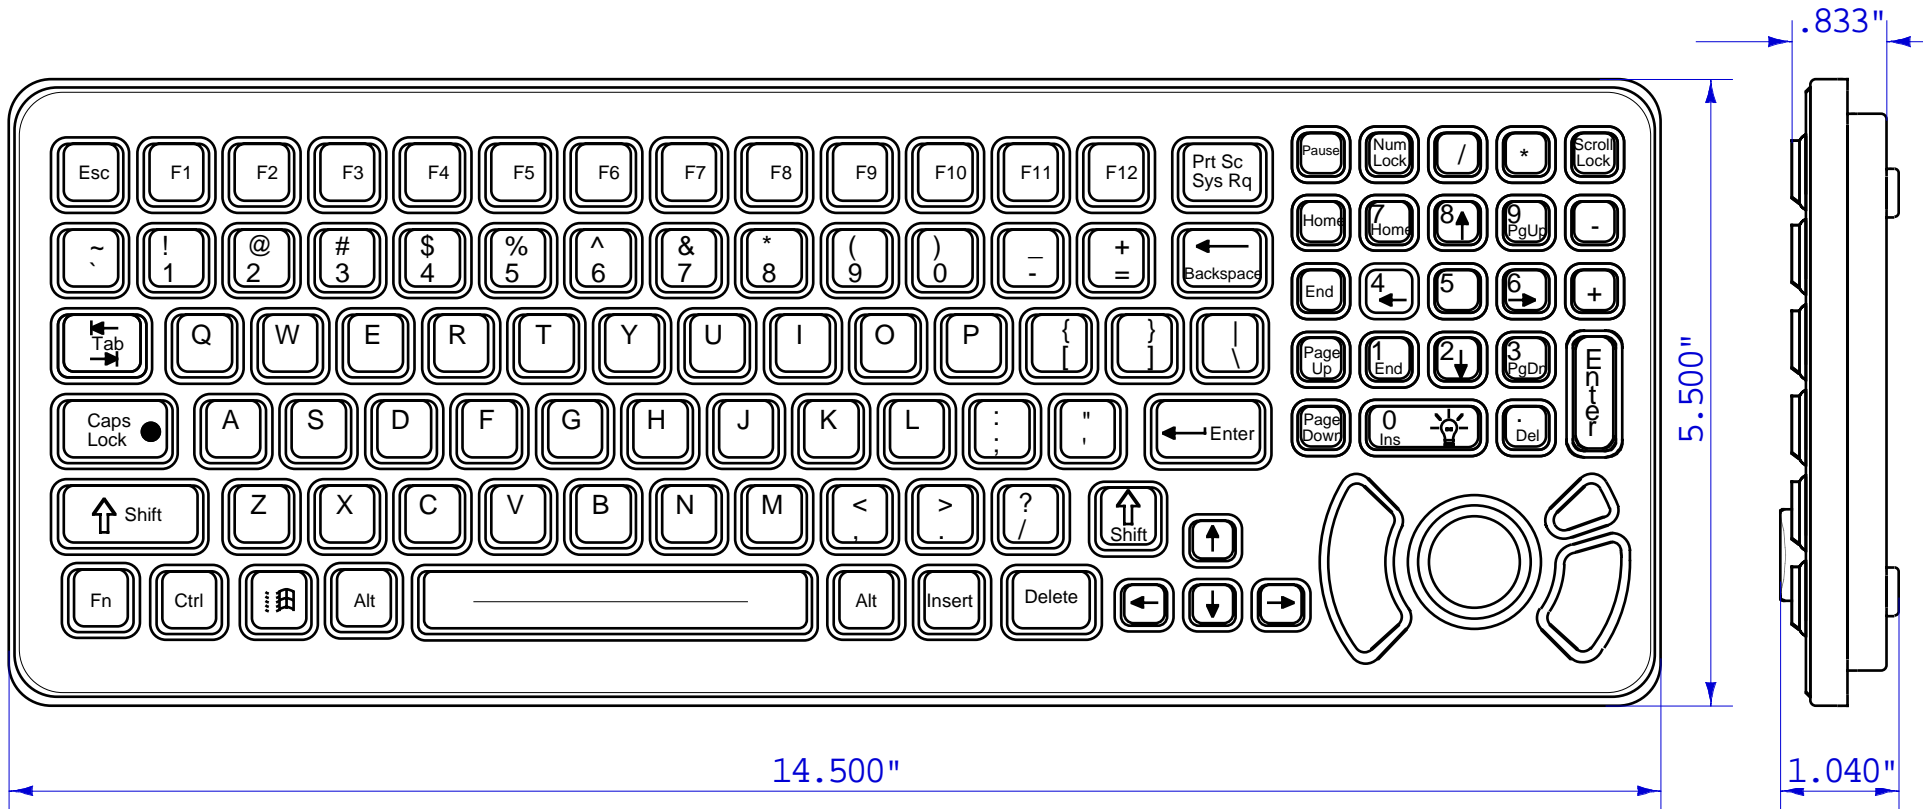

**KEY SWITCH**

MATERIAL: industrial Silicone Rubber  
 LIFE: Greater than 10 million cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 5 oz. (130g)  
 FEEDBACK: Tactile with Mechanical Snap

**HUMIDITY**

100% Humidity Resistant

**POWER**

KEYBOARD: 5V@20ma (from CPU port)  
 HULAPOINT: 5V@10ma (from mouse connection port)

**FLAMMABILITY**

PRINTED CIRCUIT BOARD: 94VO  
 SILICONE OVERLAY: 94HB  
 INTERFACE CABLE: 94VO

**TEMPERATURE**

-40 F to +194 F (-40 C to +90 C)

**SHOCK**

3 X 11 ms pulses of 50g on each of 3 axis


**VIBRATION**

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

Copyright 1999-2000 Multi-Technology Sales. All rights reserved.

 Texas Industrial Peripherals 2621 Ridgepoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 837-0283 Fax: (512) 927-8530	Part Number: SK-102-PAD-BK	Drawing Number: TIPSK102MKT	Sheet: 1 OF 2	
	Drawing Title: DIMENSIONS/ FEATURES	Revision: 1.000	Date: 10.2.03	JAE

SK-102/ SLK-102

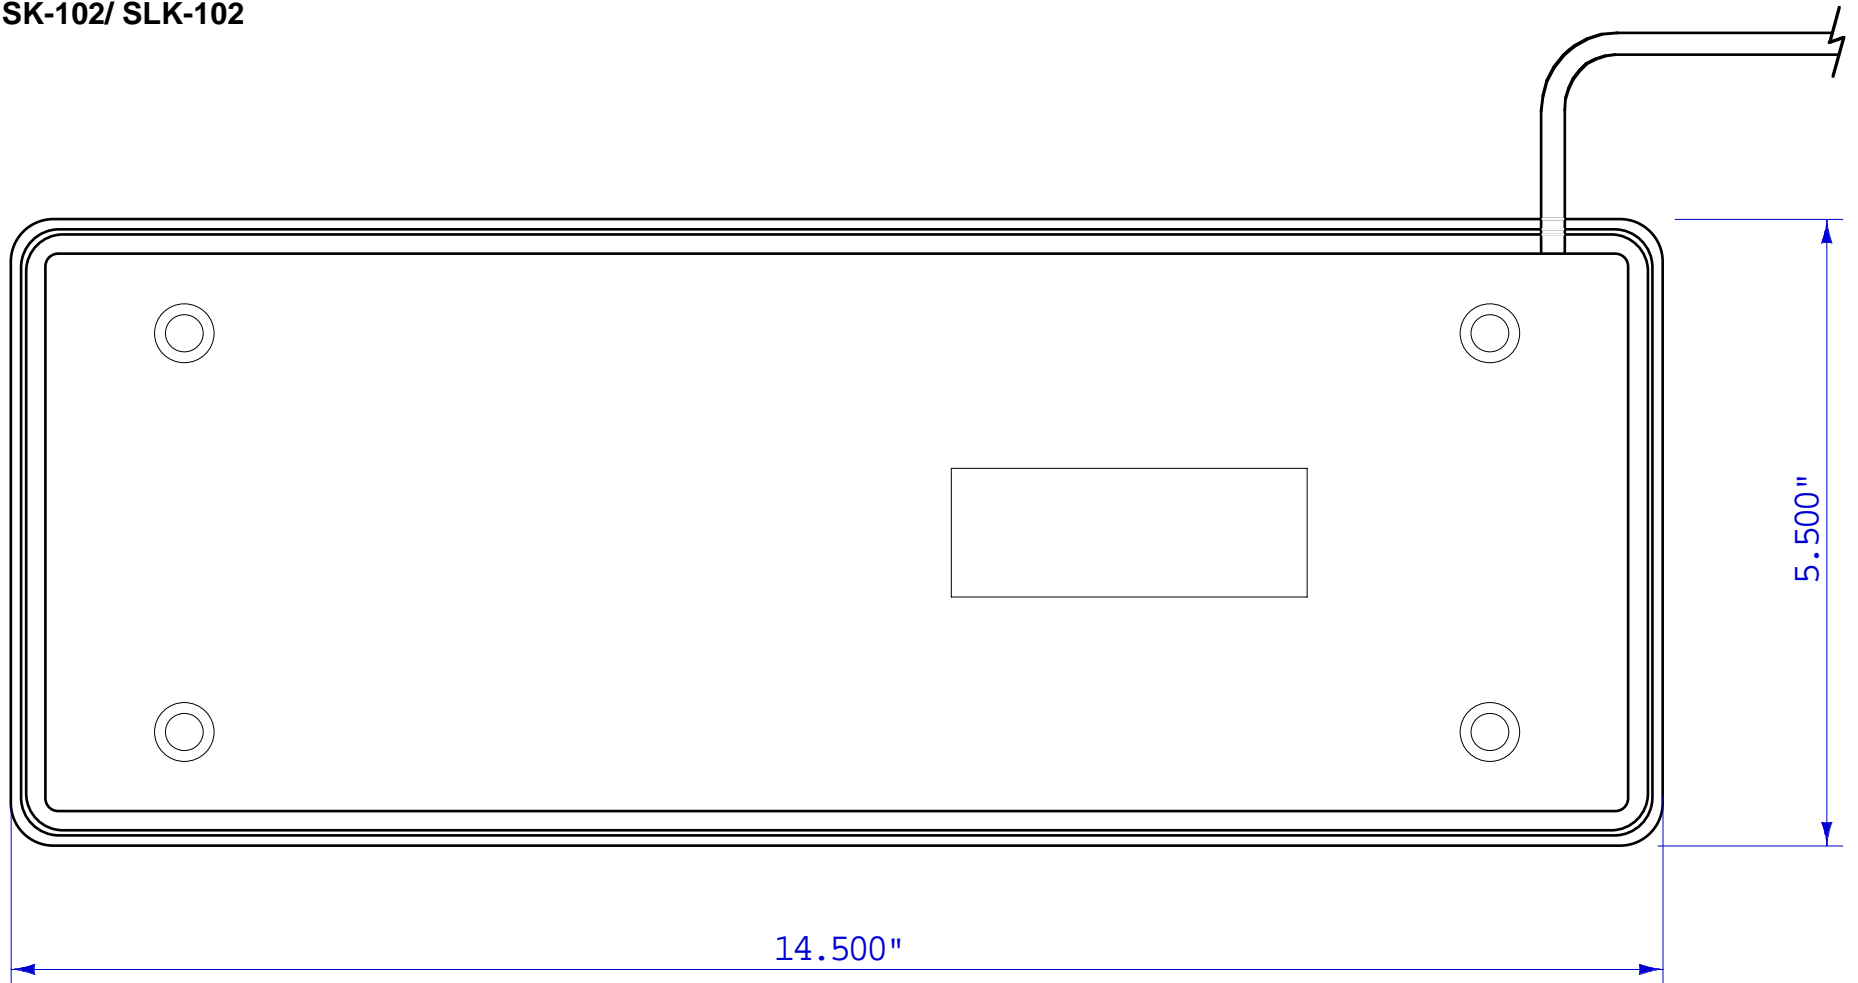

ENCLOSURE FABRICATED FROM:  
GE CYCLOLY LG900 PC/ABS/UV  
STABLE OR EQUIVALENT

Copyright 1999-2000 Multi-Technology Sales. All rights reserved.

 Texas Industrial Peripherals 2621 Ridgepoint Dr. Suite 235 Austin, Texas 78754	Part Number: SK-102-PAD-BK	Drawing Number: TIPSK102MKT	Sheet: 2 OF 2	
	Voice: (512) 837-0283 Fax: (512) 927-8530	Drawing Title: DIMENSIONS/ FEATURES	Revision: 1.000	Date: 10.2.03