


SK-102-461

DATE	CHANGES	INTL	REV
12.16.11	Original	TH	1.00

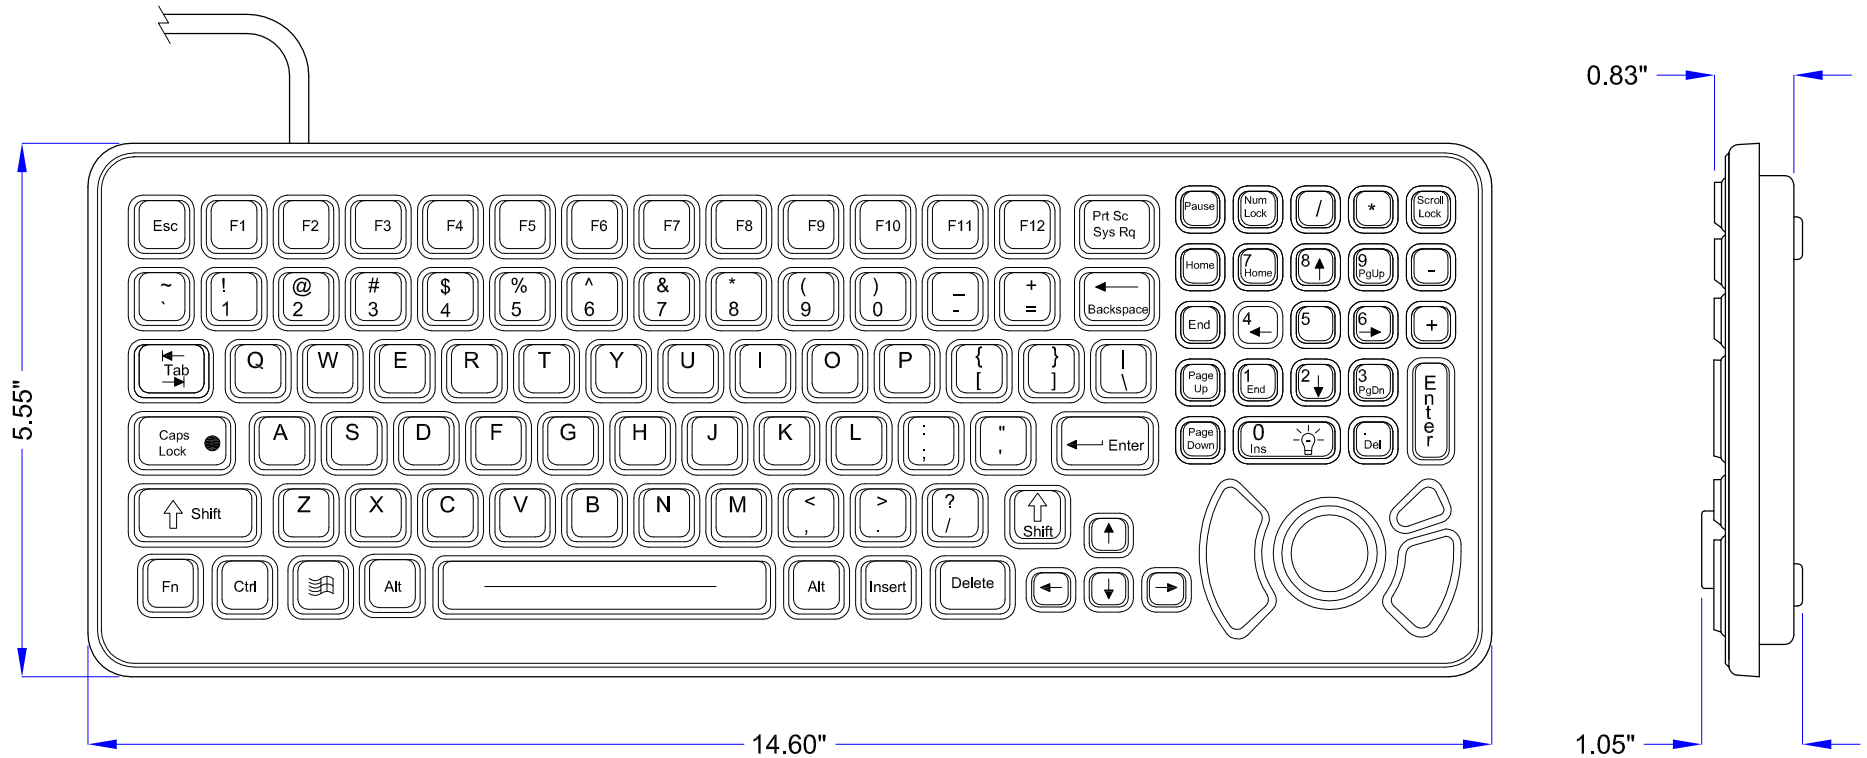

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

POWER

PS2: KEYBOARD: 50mA@5V (from Keyboard port)
 POINTER: 35mA@5V (from Mouse port)
 USB: 85mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

iKey, Ltd. 2621 Ridgpoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 837-0283 Fax: (512) 927-8530	©2011 iKey, Ltd.	Part Number: SK-102-461	Drawing Number: MKT0299	Sheet: 1 OF 1	
		Drawing Title: SK-102-461-MKT	Revision: 1.0	Date: 12.16.11	TWH