


SLK-102-TP

DATE	CHANGES	INTL	REV
06.01.05	Original		1.00
08.15.08	Updated Format	JB	1.00

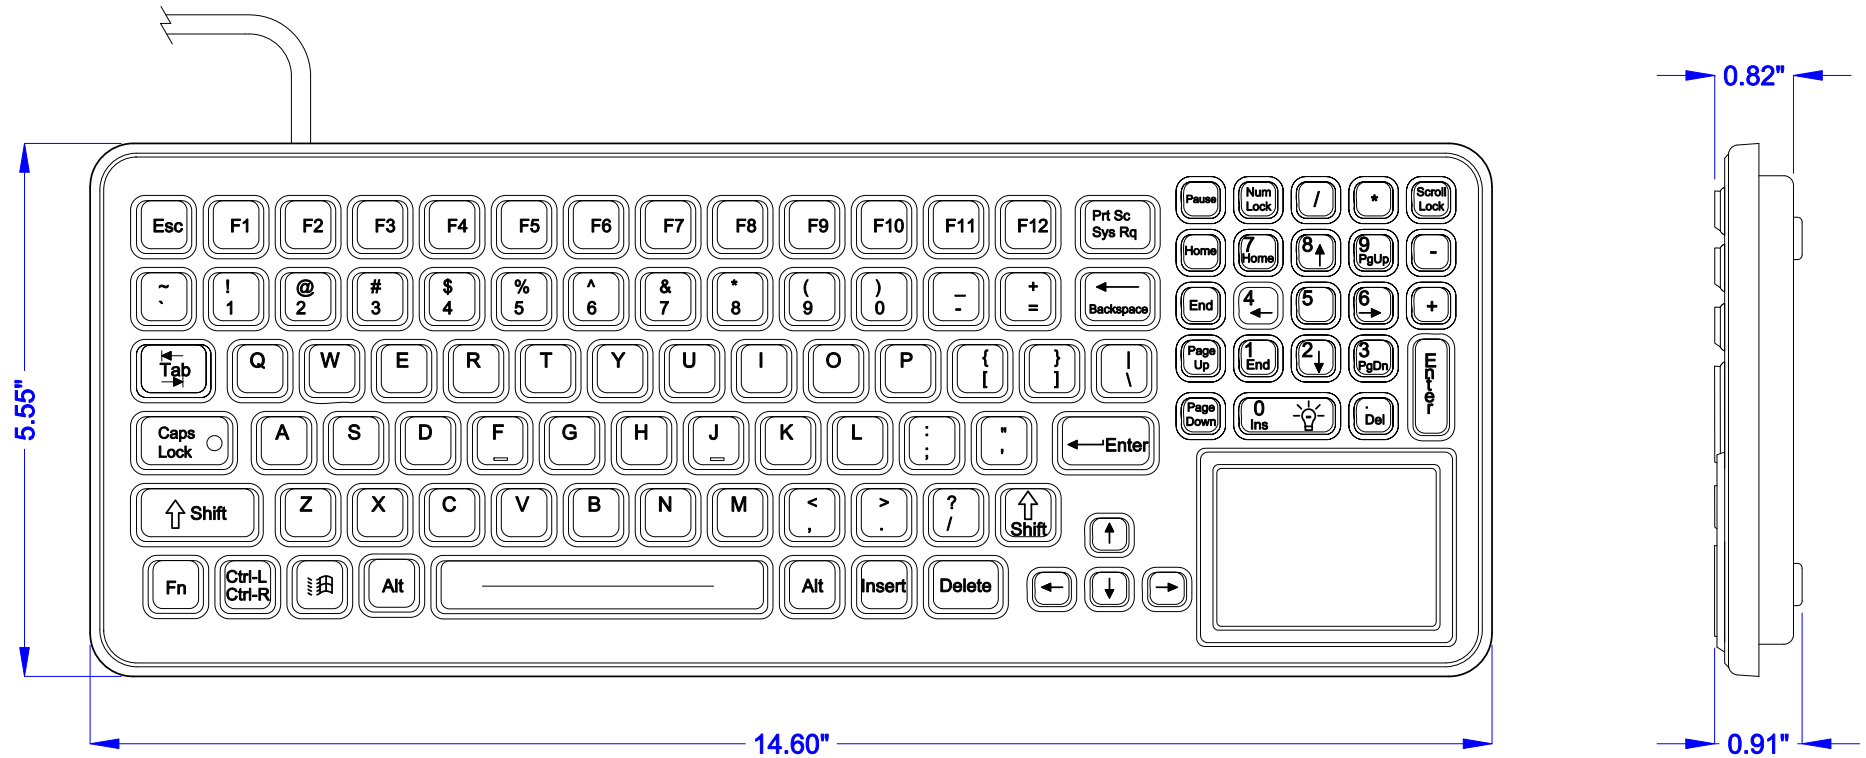

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

POWER

PS2: KEYBOARD: 210mA@5V (from Keyboard port)
TOUCH PAD: 10mA@5V (from Mouse port)
USB: 220mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +149°F (-40°C to +65°C)
OPERATING: 32°F to +140°F (0°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2