


TMLT-890-TP-OEM

DATE	CHANGES	INTL	REV
08.03.10	Original	JMW	1.0

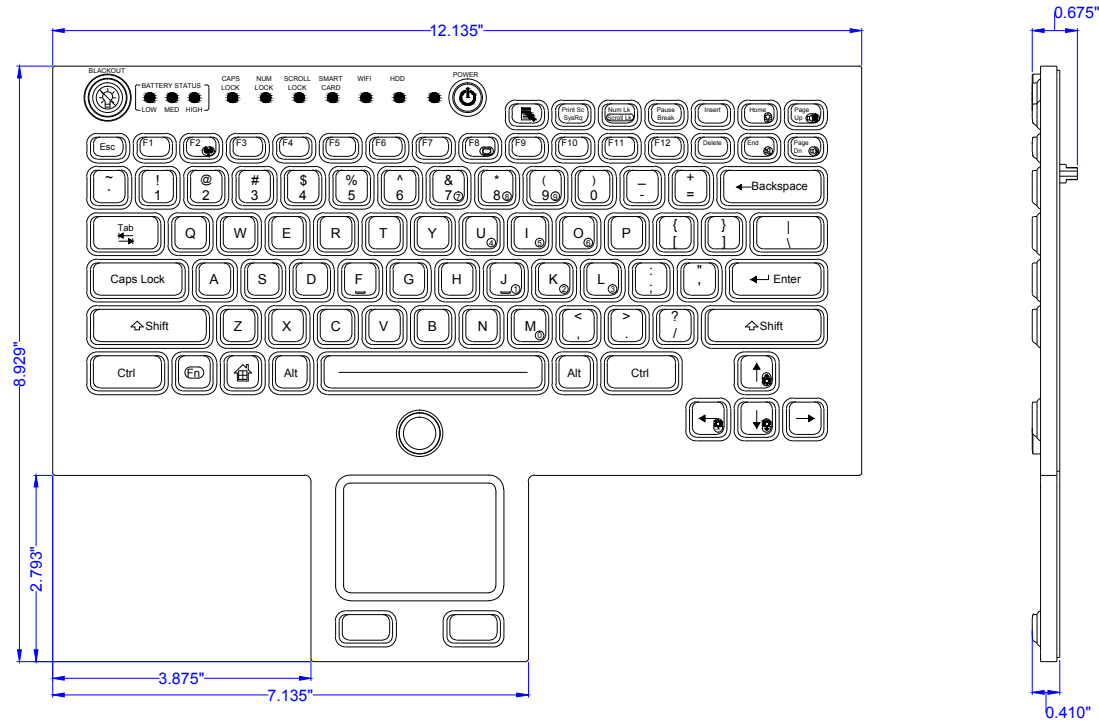

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE 6.35 oz. +/- 1.06oz (180g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

300 mA@5V
 KEYBOARD/BACKLIGHT
 PS2/POINTER
 PS2/TOUCHPAD

TEMPERATURE RANGE

STORAGE: -59.8°F to +159.8°F (-51°C to +71°C)
 OPERATING: -40°F to +140°F (-40 to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.40 lbs +/- 0.10 lbs (0.63 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:1.75



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754


©2010 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: TMLT-890-TP-OEM
 Drawing Title: TMLT-890-TP-OEM-MKT

Drawing Number: MKT0234
 Revision: 1.0

Sheet: 1 OF 2
 Date: 08.03.10
 JMW

TMLT-890-TP-OEM MOUNTING

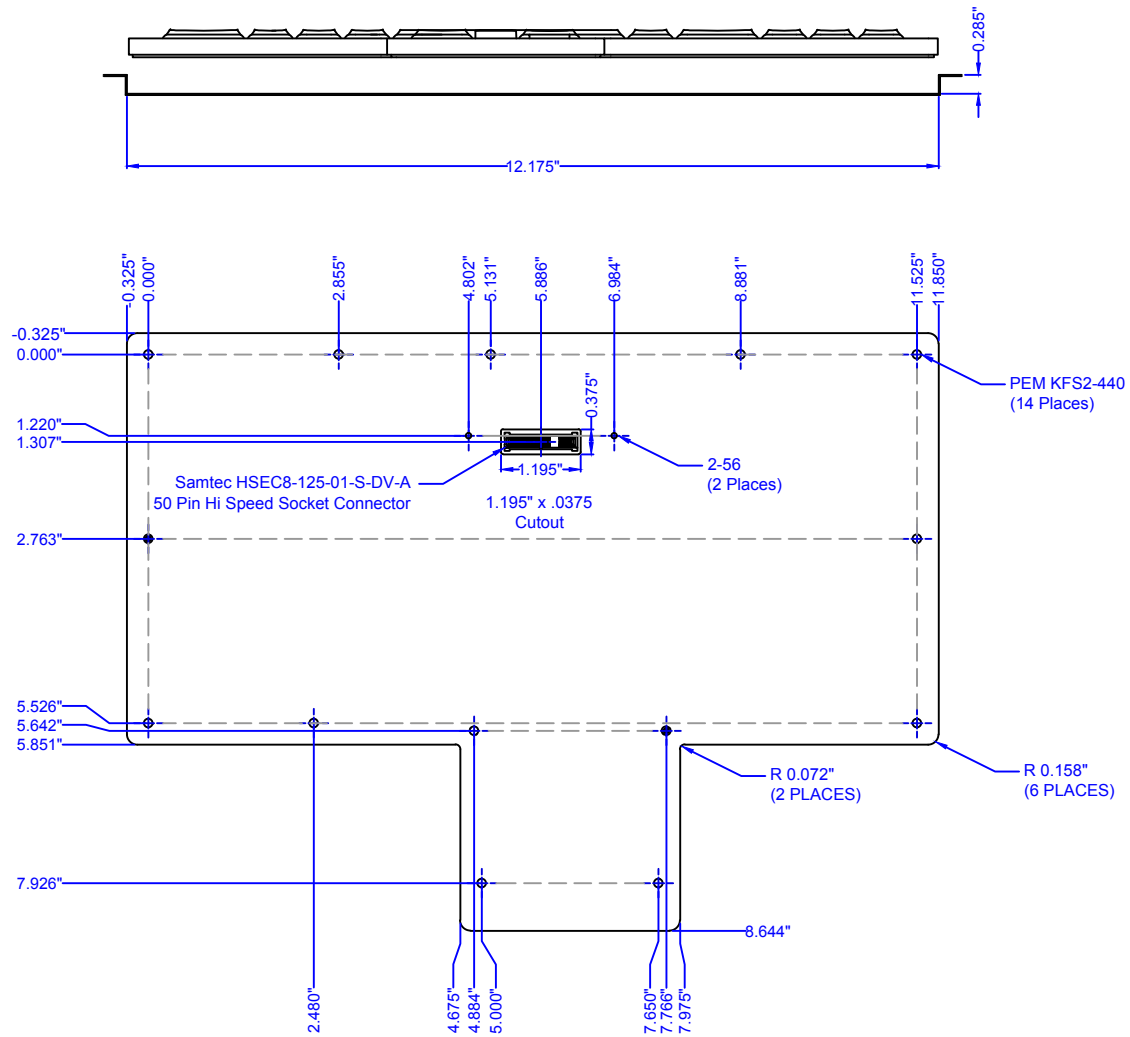

Bottom View

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:1.75



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2010 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: TMLT-890-TP-OEM
Drawing Title: TMLT-890-TP-OEM-MKT

Drawing Number: MKT0234
Revision: 1.0

Sheet: 2 OF 2
Date: 08.03.10

JMW